


www.temtaragri.com



TEM TAR
AGRICULTURAL MACHINERY





TEM TAR

AGRICULTURAL MACHINERY



www.temtaragri.com





COMPANY PROFILE


Our company TEMTARAGRI was based in 1975. In a short time, past experiences, a wide assortment of products and successful realization of projects, it has achieved great success in the production of meadow mowers.

We as an agriculture company, focus on satisfying the needs of our customers, in addition we consultate them about our products. To achieve the high quality of our products, we set highest quality standard in advance, and we do not deviate a single step from the established standard till the end of manufacturing. That's why TEMTARAGRI produces a wide range of quality products.

Our company pays special attention to the development of its employers in the professional sphere. Thus, bringing their work under high quality due to high quality standard, which insure our customers with contentment of products.

From the moment of our foundation for now, we work for our clients. TEMTARAGRI was founded under the motto "Excellent service and trust." This means that every day we work to earn the trust of our customers with our products.

The mission we have undertaken as an TEMTARAGRI is to produce high-quality, customer oriented products. Our main goal is growing with developing Turkey, and being responsible in the environment, as well as human values.

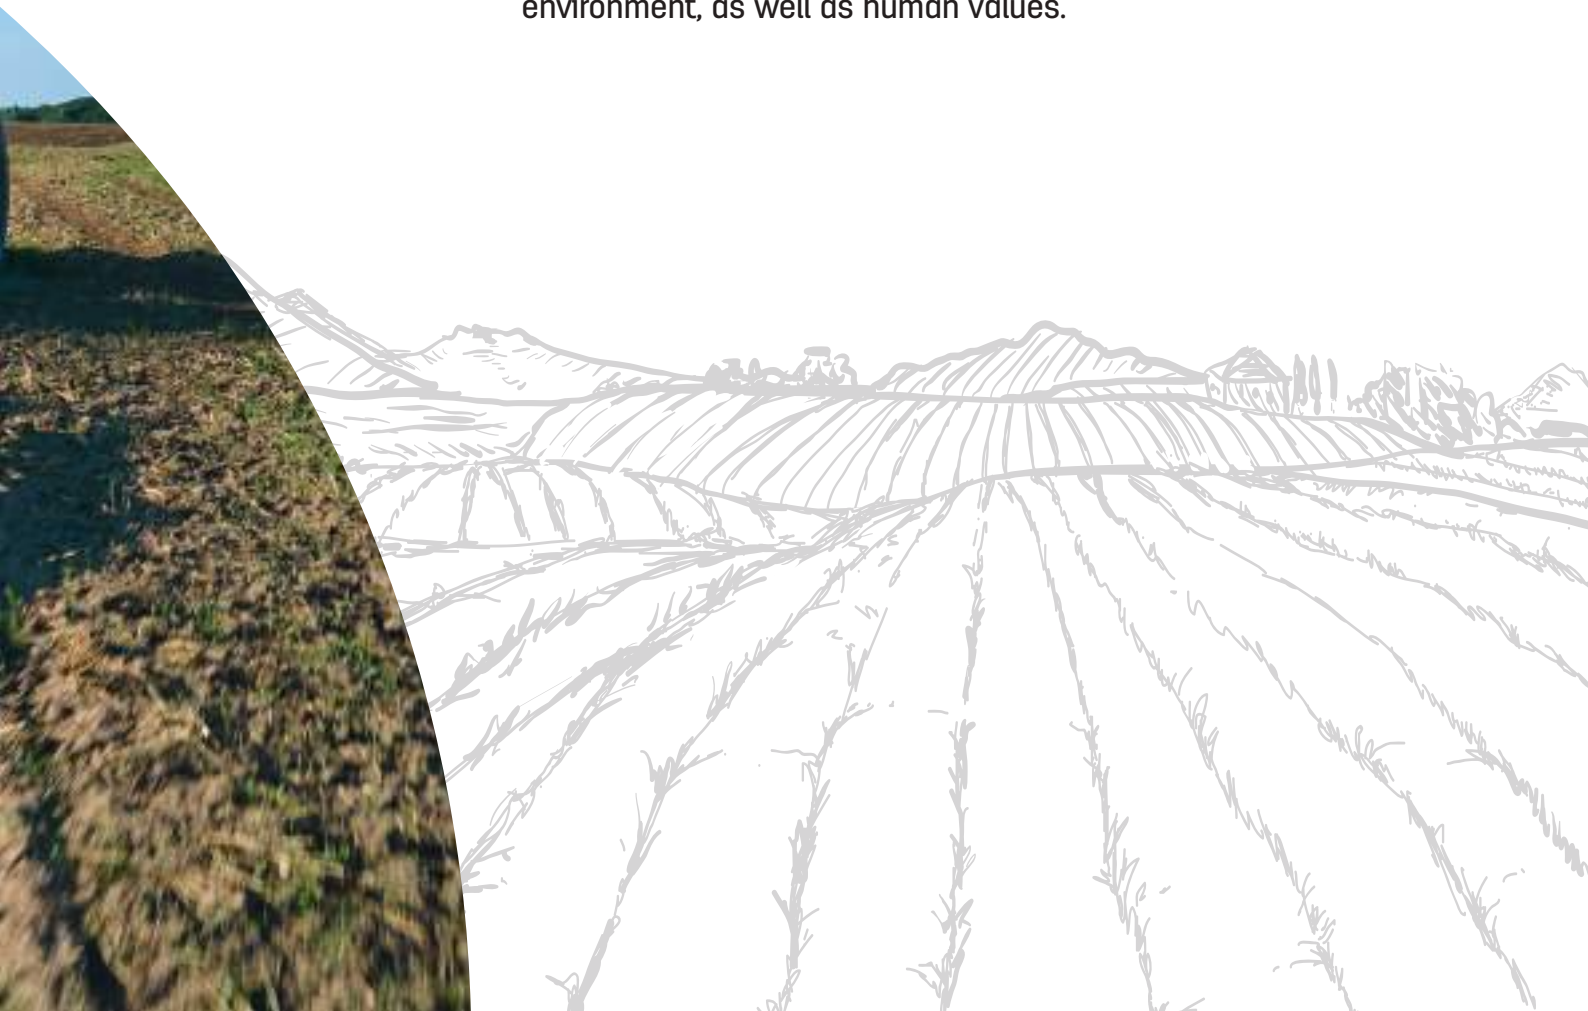



TEM TAR
AGRICULTURAL MACHINERY



BALER MACHINE

TA-155





TECHNICAL SPECIFICATIONS

Lenght	5440 mm (Working Cond. 6370 mm)
Width	2520 mm
Height	1740 mm
Weight	1750 kg
Tire Size Right	10.0/75 - 15,3 PR
Tire Size Left	225/70R15
Daily Capacity	2000/3000 Pieces
Bale Size	30 x 135 cm
Bale Weight	20/35 kg
Power Requirement	45/50 HP
Piston Stroke	72 cm
Pick-up Inside Width	1535 mm
Connecting System	2 ropes





TEMTAR
AGRICULTURAL MACHINERY



WIDE LEVEL DISC HARROW SESAME SEEDER

TA-165





TECHNICAL SPECIFICATIONS

MODEL	TA-165-024	TA-165-030	TA-165-036
Number Of Rows	24	30	36
Width	6500 Mm	7500 Mm	8500 Mm
Length	3700 Mm	3700 Mm	3700 Mm
Height	1240 Mm	1240 Mm	1240 Mm
Working Width	4100 Mm	5125 Mm	6150 Mm
Space Between Units	175 Mm	175 Mm	175 Mm
Seed Capacit	30 Lt	530 Lt	640 Lt
Working Speed	4-8 Km/S	4-8 Km/S	4-8 Km/S
Disc Diameter	510 Mm	510 Mm	510 Mm
Required Power	75-85 Hp	85-95 Hp	95-100 Hp
Weight	1230 Kg	1600 Kg	1980 Kg





TEMTAR
AGRICULTURAL MACHINERY



CHICKPEA SEED DRILL

TA-175





TECHNICAL SPECIFICATIONS

Model	TA-175-9x1800	TA-175-11x2200	TA-175-13x2600	TA-175-15x3000
Number Of Tines	9	11	13	15
Chickpeas Sowing Distance	200	200	200	200
Length At Park Position	2200	2800	3200	3400
Width At Park Position	1400	1400	1400	1400
Height At Park Position	1550	1550	1550	1550
Chassis Length	650	650	650	650
Working Length	1800	2200	2600	3000
Weigth	700	750	850	950





TECHNICAL SPECIFICATIONS

Working Capacity	1750 kg/hour
Daily Capacity	5-6 Hectare in 8 hours
Tank Capacity	700 Kg
Required Power	70 HP
Length	5700 mm
Width	2600 mm
Height	3100 mm
Weight	2800 Kg
Feeding Chamber	1200 mm
Number of Pathose Axes	54
Standard Sieve Diameter	28 mm (14-35 mm Optional)
Wheel Dimension	10.0/75-15,3



TA-195

BEANS DIGGER MACHINE



TECHNICAL SPECIFICATIONS

Working Width	2330 mm (5 lines x 45 cm sowing distance)
Daily Harvesting Capacity	6-8 Hectare (Depends on contiditions such as weather, humidity, crop frequency)
Width	2888 mm
Height	1569 mm
Number of Blades	3757 mm
Transport Width	2450 mm
Weight	1500 Kg
Required Power	85 HP (Dual Thrust)
Harvestable Legumes	Cranberry, Soybean, Navy, Pinto, Adzuki, Fava, Lima, Black, Lentil, Red Kidney, Split Pea, Garbenzo, Mung, Great Northern, Black-Eyed Peas, Anasazi, Cannelini



TECHNICAL SPECIFICATIONS

Model	TA-205-12	TA-205-14	TA-205-16	TA-205-18	TA-205-20	TA-205-22	TA-205-24
Number Of Tines	12	14	16	18	20	22	24
Total Length (Mm)	2380	2650	2920	3190	3460	3730	4000
Total Planting Length (Mm)	1490	1750	2020	2290	2560	2830	3100
Total Planting Parking (Mm)	1300	1300	1300	1300	1300	1300	1300
Box Length	1780	2050	2320	2590	2860	3130	3400
Total Height	135	135	135	135	135	135	135
Total Capacity (Dm3)	250	310	325	365	405	445	485
Manure Capacity (Dm3)	185	220	250	280	310	340	370
Disc Range Between Planting (Mm)	135	135	135	135	135	135	135
Weight	710	760	820	880	940	1000	1160
Digging Depth Of Discs (Mm)	150	150	150	150	150	150	150



TA-215

SILAGE MACHINE






TECHNICAL SPECIFICATIONS

Length (CM)	400
Width (CM)	140
Height (CM)	95
Weight (KG)	475
Foot Pcs (CM)	4
Foot Depth (CM)	42
Working Depth (CM)	MAX 60 CM
2 Foot Between Distance (CM)	95
Tractor power (PH)	70-90
Tire Dimensions	7.50X16



TA-235

PLOUGH

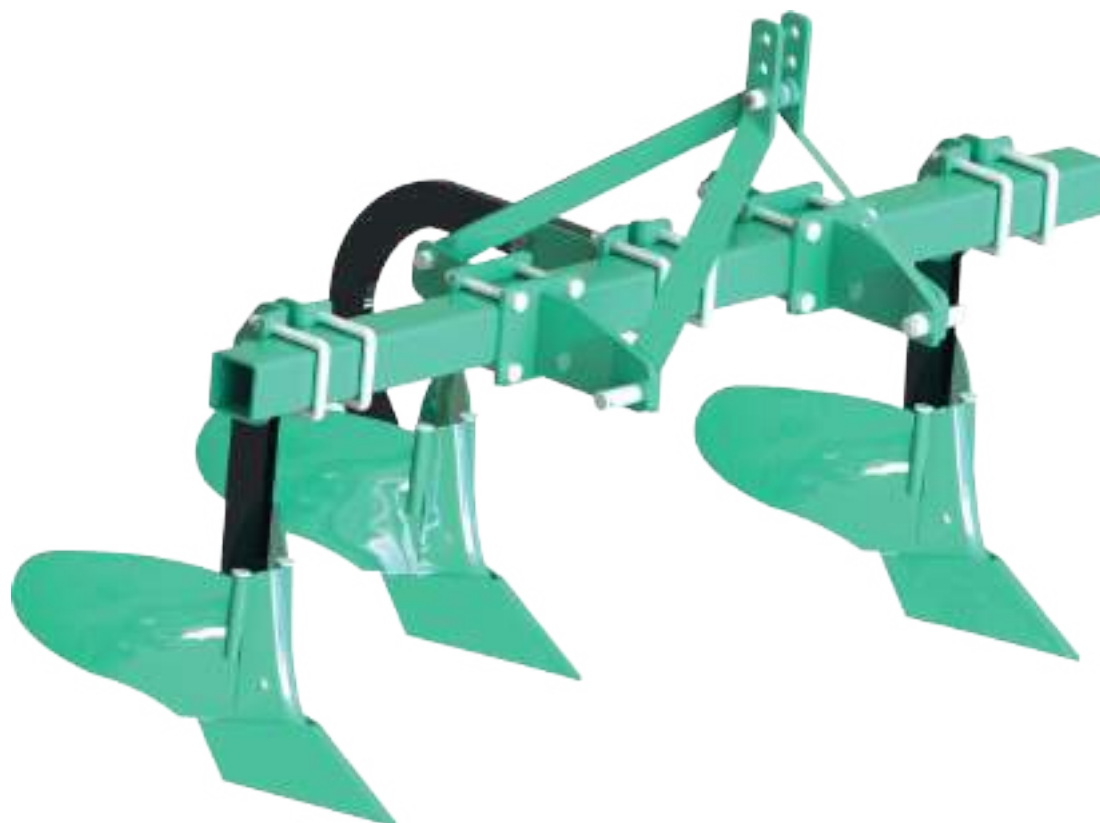

TECHNICAL SPECIFICATIONS

Model	TA-235-3	TA-235-4
Length (CM)	190	260
Weight (KG)	150	210
Foot Pcs (CM)	3	4
Foot Depth (CM)	20	20
2 Foot Between Distance (CM)	90	80
Tractor power (PH)	35-60	35-60



TECHNICAL SPECIFICATIONS

Model	TA-245-28	TA-245-32	TA-245-36	TA-245-40
Disc Quantity (Pcs)	28	32	36	40
Disc Diameter (Mm)	510X4	510X4	510X4	510X4
Working Width (Mm)	2550	2900	3240	3600
Weight (Kg)	1250	1370	1490	1600
Disc Space (Mm)	175	175	175	175
Bearing No	8	12	12	12
Necessary Power	60-75	70-80	80-90	90-100



TA-255

TRAILED & MOUNTED V TYPE GOBLE DISC HARROW



TECHNICAL SPECIFICATIONS

Model	TA-255-16	TA-255-18	TA-255-20	TA-255-22	TA-255-24
Disc Quantity	16	18	20	22	24
Disc Diameter (mm)	610X4	610X4	610X4	610X4	610X4
Working Width (mm)	1840	2070	2330	2530	2760
Weight (kg)	800	1004	1058	1108	1230
Disc Space (mm)	220	220	220	220	220
Bearing No	4	4	6	6	8
Necessary Power (hp)	65-75	80-85	90-95	100-105	110-115



A	B	C
40	210	11,5



A	B	C
66	260	46



A	B	C
105	420	63
70	430	63




A	B	C
60	315	63



TECHNICAL SPECIFICATIONS

Model	TA-265-5	TA-265-7	TA-265-9	TA-265-11
Number Of Tines (pcs)	5	7	9	11
Working Width (cm)	128	191	235	289
Total Width (cm)	157	220	270	320
Length (cm)	110	110	110	120
Combined Roller Length (cm)	187	187	187	197
Total Height (cm)	133	133	133	133
Working Depth (cm)	68	68	68	68
Weight (kg)	400	450	560	700
Combined Roller weight (kg)	565	650	800	970
Required Power (hp)	60-70	70-80	80-90	90-100



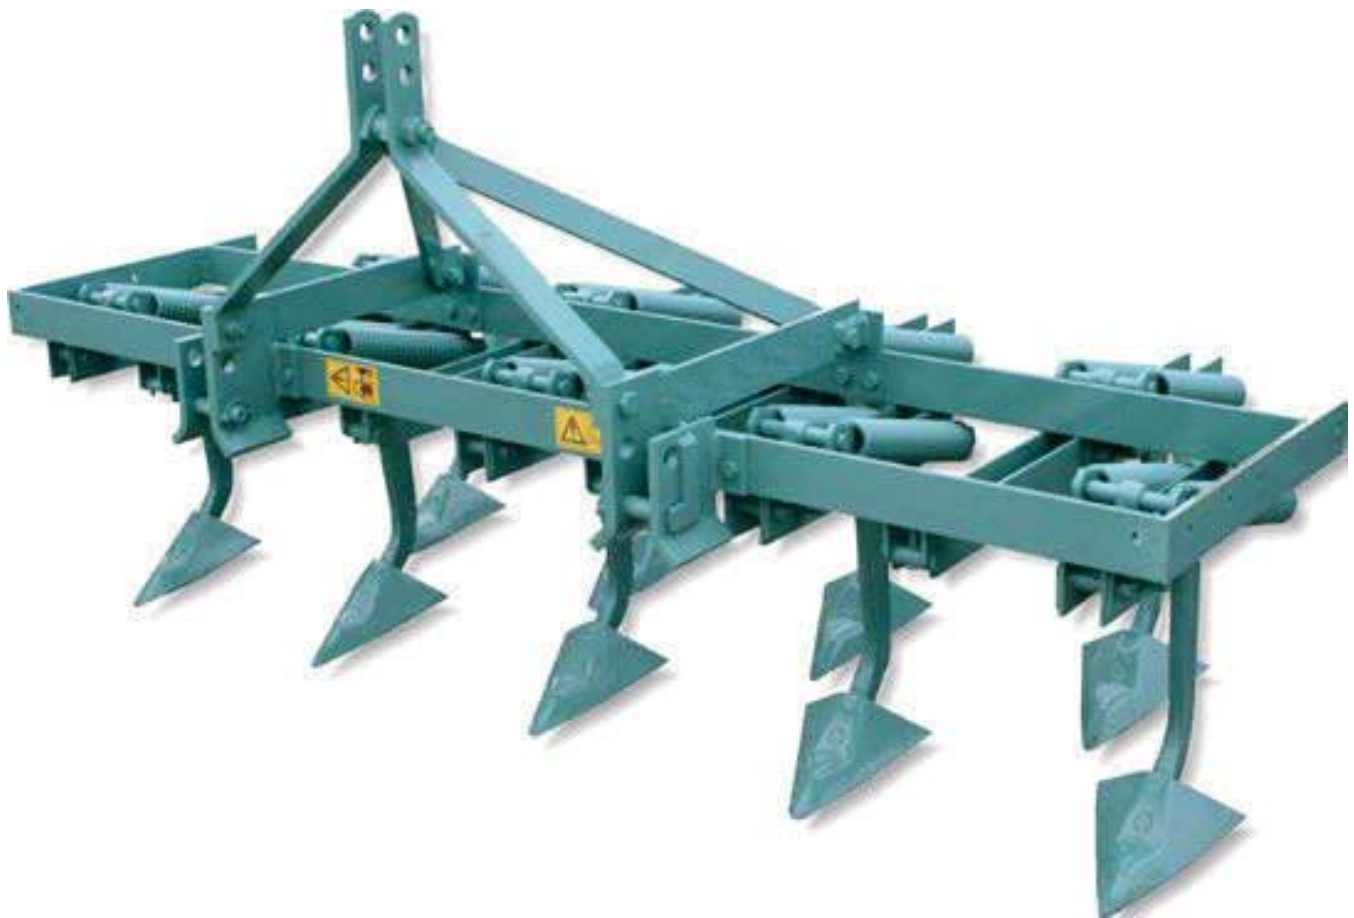


TECHNICAL SPECIFICATIONS

Model	TA-275-7	TA-275-9	TA-275-11	TA-275-13	TA-275-15
Number Of Tines (pcs)	7	9	11	13	15
Length (cm)	175	225	275	325	375
2 Foot Between Distance (cm)	54	54	54	54	54
Foot Length (cm)	46	46	46	46	46
Weight (kg)	260	320	420	470	520
Required Power (hp)	45-60	60-70	70-80	80-90	90-110



TA-285

CULTIVATOR

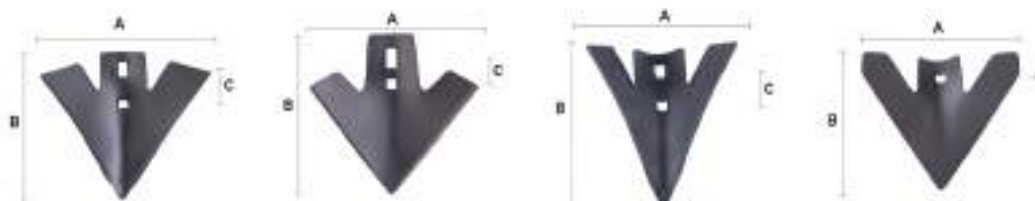

A	B	C
265	205	46
310	225	46

A	B	C
225	205	35
285	225	35

A	B	C
235	235	55
290	240	55
290	270	48

A	B	C
155	140	11

TECHNICAL SPECIFICATIONS

Model	TA-285-5	TA-285-7	TA-285-9	TA-285-11	TA-285-13
Number Of Tines (pcs)	5	7	9	11	13
Working Width (cm)	125	170	238	278	330
Combined Roller Length (cm)	187	187	187	187	187
Total Height (cm)	133	133	133	133	133
Working Depth (cm)	25	25	25	25	25
Weight (kg)	238	286	362	435	502
Required Power (hp)	30-40	40-50	50-80	80-100	80-110



TECHNICAL SPECIFICATIONS

Model	Underbeam Clearance	Interbody Clearance	Working Width	Working Depth	Weight (Kg)			Power Requirement (Hp)		
					3	4	5	3	4	5
TYPE	(Cm)	(Cm)	(Cm)	(Cm)						
TA-295-16	75	85	30-35-40-45	36	945	1172	1370	80-90	90-110	110-150
TA-295-18	80	95	30-35-40-45	40	980	1240	1436	85-100	95-115	110-160



TA-305

WEDGE PLOUGH (STANDART TYPE)



TECHNICAL SPECIFICATIONS

Model	TA-305-28	TA-305-32	TA-305-36
Type	3	4	5
Working Width (Mm)	101	128	155
Working Depth (Cm)	38	38	38
Leg Space (Cm)	68	68	68
Chassis Height (Cm)	72	72	72
Weight (Kg)	384	512	665
Necessary Power	50-60	70-85	80-90



TECHNICAL SPECIFICATIONS

Model	TA-315-2	TA-315-3	TA-315-4	TA-315-5
Number Of Discs (pcs)	2	3	4	5
Total Length (mm)	1355	2330	2520	2910
Total Width (mm)	1115	1265	1420	1570
Total Height (mm)	1235	1235	1235	1235
Total Weight (kg)	310	410	470	540
Disc Diameter (mm)	660-700	660-700	660-700	660-700
Disc Distance (mm)	530	530	530	530
Working Width (mm)	660-700	990-1050	1320-1400	1650-1750
Required Power (hp)	35-40	55-60	70-80	85-90



TA-325

THRESHING MACHINE



TECHNICAL SPECIFICATIONS

Model	TA-325
Lenght	4,100 mm
Width	2,050 mm
Height	2,350 mm
Wieght	1,450 kg
Beater Width	1,200 mm
Number Beater Of Blades	44
"Beater Sieve Diameters Diameters"	14-16-20 mm
Tier Size	600 X 16
Power Requirement (Min)	1200 rpm/min



GARDEN SPRAYER

TA-335

**400
Lt.**



**500
Lt.**



TECHNICAL SPECIFICATIONS

Model	TA-335-400	TA-335-500
Tank (lt)	400	500
Pump	TA-96	TA-96
Pressure	40	40
Spraying Handle (M)	10-12	10-12
Nozzle	20-26	20-26
Required Power (hp)	50-70	50-70
Eccentric Period	540	540



TA-345

GARDEN SPRAYER



**600
Lt.**



**800
Lt.**



TECHNICAL SPECIFICATIONS

Model	TA-345-600	TA-345-800
Tank (lt)	600	800
Pump	TA-96	TA-96
Pressure	40	40
Spraying Handle (M)	10-12	10-12
Nozzle	20-26	20-26
Required Power (hp)	50-70	50-70
Eccentric Period	540	540



TECHNICAL SPECIFICATIONS

Model	TA-355-1000
Tank (lt)	1000
Pump	ES-96
Pressure	40
Spraying Handle (M)	10-12-16
Nozzle	20-26
Required Power (hp)	50-70
Eccentric Period	540



TA-365

FERTILIZER MACHINE



TECHNICAL SPECIFICATIONS

Model	TA-365-350
Capacity (lt)	350
Work Width (m)	16-18
Height (mm)	1450
Width (mm)	1100
Length (mm)	1050
Machine Weight (Kg)	80
Leaf Spreader Piece	5
Propeller Piece	single



TECHNICAL SPECIFICATIONS

Model	TA-375-400	TA-375-600
Capacity (lt)	400	600
Work Width (m)	16-20	16-20
Height (mm)	1108	1198
Width (mm)	1030	1120
Length (mm)	1140	1198
Machine Weight (Kg)	130	150
Stainless Steel Leaf	Opsiyonel	Opsiyonel
Stainless Steel Disc	Opsiyonel	Opsiyonel



TA-385

FERTILIZER MACHINE



TECHNICAL SPECIFICATIONS

Model	TA-385-800	TA-385-1000
Capacity (lt)	800	1000
Work Width (m)	16-20	16-20
Height (mm)	1290	1460
Width (mm)	1110	1100
Length (mm)	1650	1650
Machine Weight (Kg)	180	190
Stainless Steel Leaf	Opsiyonel	Opsiyonel
Stainless Steel Disc	Opsiyonel	Opsiyonel



TECHNICAL SPECIFICATIONS

Model	TA-395-800	TA-395-1000
Capacity store (lt.)	800	1000
Working Width (m)	18-24	18-24
Height (mm)	1260	1260
Width (mm)	1150	1150
Length (mm)	1700	1800
Weight (kg)	225	230
Transmission Distance (cm)	50	50
Disc Type	Double	Double



TA-405

FERTILIZER MACHINE



TECHNICAL SPECIFICATIONS

Model	TA-405-1200	TA-405-1500
Capacity store (lt.)	1200	1500
Working Width (m)	18-24	18-24
Height (mm)	1220	1225
Width (mm)	1150	1150
Length (mm)	1800	1800
Weight (kg)	235	240
Transmission Distance (cm)	50	50
Disc Type	Double	Double



TECHNICAL SPECIFICATIONS

Cutting Width	1800 mm
Total Weight	180 Kg
Knife Quantity	25 Adet / Pieces
Finger Quantity	24 Adet / Pieces
Eccantric Period	1300 d/dak.
Average Knife Speed	3.29 m/s



TA-425

DOUBLE ACTION SICKLE BAR MOWER



**180
cm**



**205
cm**



**230
cm**



TECHNICAL SPECIFICATIONS

Model	TA-425-180	TA-425-205	TA-425-230
Cutting Width	180 cm	205 cm	230 cm
Total Weight	220 Kg	240 Kg	260 Kg
Knife Quantity	24 Adet / Pieces	28 Adet / Pieces	32 Adet / Pieces
Finger Quantity	12 Adet / Pieces	14 Adet / Pieces	16 Adet / Pieces
Eccentric Period	1300 d/dak.	1300 d/dak.	1300 d/dak.
Average Knife Speed	3.29 m/s	3.29 m/s	3.29 m/s



**140
cm**



TECHNICAL SPECIFICATIONS

Transport Position (mm)	3460
Overall Width (mm)	1900
The Height of Crop (mm)	700-1800
Overall Height (mm)	1100
Reaping Width (mm)	1400

TECHNICAL SPECIFICATIONS

Reaping Height (mm)	Adjustable
Capacity (da/h)	11
Machine Weight (Kg)	400
PTO (min/lt)	540
Requirer Tractor Power (Hp)	45-55



TA-445

REAPER BINDER MACHINE



TECHNICAL SPECIFICATIONS	
Transport Position (mm)	3600
Overall Width (mm)	1900
The Height of Crop (mm)	700-1800
Overall Height (mm)	1100
Reaping Width (mm)	1800

TECHNICAL SPECIFICATIONS	
Reaping Height (mm)	Adjustable
Capacity (da/h)	11
Machine Weight (Kg)	410
PTO (min/lt)	540
Requirer Tractor Power (Hp)	45-55



TECHNICAL SPECIFICATIONS

Power Supply	Diesel
Power (Hp)	12
Wheels	4.50 - 19
Machine Weight (Kg)	240
Working Width (cm)	140
Forward speed in km/h	I: 5,5 - II: 7,5 - III: 10 - IV: 14,2 - RM: 6
No. of gears	4+1



TA-465

622 MOWER



TECHNICAL SPECIFICATIONS

Power Supply	Diesel
Power (Hp)	12
Wheels	4.50 - 19
Machine Weight (Kg)	190
Working Width (cm)	140
Forward speed in km/h	I: 5,5 - II: 7,5 - III: 10 - IV: 14,2 - RM: 6
No. of gears	4+1



TEMTAR
AGRICULTURAL MACHINERY



Area with horizontal dotted lines for writing.



A series of horizontal dotted lines for writing, spanning the width of the page below the header.



TEMTAR
AGRICULTURAL MACHINERY



Multiple horizontal dotted lines for writing.



A large area of horizontal dotted lines for writing, spanning most of the page width and height.



TEMTAR

AGRICULTURAL MACHINERY

TEMTAR AGRICULTURAL MACHINERY

Fevzi Çakmak Mah. Milenyum Cad.

No:17/J Karatay / KONYA / TÜRKİYE

Tel : +90 332 233 55 43

Fax : +90 332 233 12 72

www.temtaragri.com

info@temtar.com

TEMTAR

GROUP



divayn
tasarım